


CT 10060

Current Transformers with a ratio of Ip/5, for measurement devices such as ammeters, kilowatt hour meters and multi meters. Ratios ranging from 100/5A to 1600/5A and a plastic case in accordance with Thermal Class E. the CT 10060 comes complete with sealable integrated terminal cover.

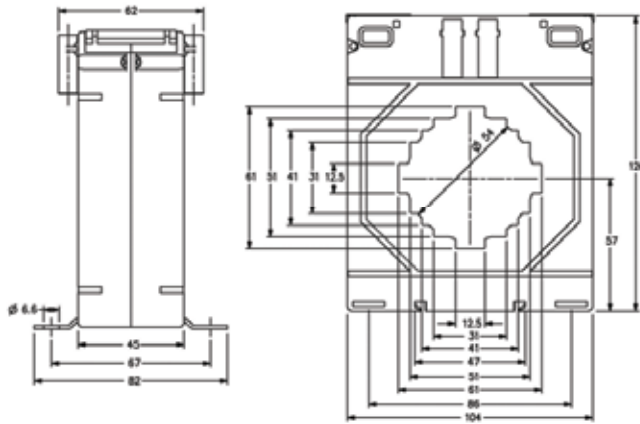

Key Features

- Highest Voltage: 0.72kV
- Frequency: 50/60Hz
- Standard: IEC, IEEE, CAN, AS
- Burden: 1.5 - 45VA
- Accuracy Class: 0.2s - 3%
- Thermal Class E Material
- Integrated Terminal Cover
- Mounting Feet Included
- Captured Terminal Screws

Electrical Characteristics		Mechanical Characteristics	
Highest Voltage	0.72 kV	Material Thermal Class	E
Frequency	50/60 Hz	Integrated Terminal Cover	Yes
Standard	IEC 60044-1	DIN Rail Mounting	NA
Primary Ratio (Ip)	100 - 1600A	Busbar / Cable Clamp	Yes
Burden	1.5 - 45 VA	Mounting Feet	Yes
Accuracy Class	0.2s - 3%	Captured Terminal Screws	Yes

Ratio	Maximum VA @ Class				
	Class 0.2s	Class 0.2	Class 0.5	Class 1	Class 3
100/5A	-	-	-	1.5	3.75
120/5A	-	-	-	2.5	5.0
125/5A	-	-	-	2.5	5.0
150/5A	-	-	2.5	5.0	10
200/5A	-	-	3.75	10	15
250/5A	-	1.5	7.5	12.5	15
300/5A	1.5	2.5	10	15	20
400/5A	2.5	3.75	10	15	20
500/5A	3.75	7.5	15	20	30
600/5A	5.0	10	15	30	-
750/5A	5.0	15	20	30	-
800/5A	7.5	15	30	30	-
1000/5A	10	20	30	45	-
1200/5A	10	30	30	45	-
1250/5A	10	30	30	45	-
1500/5A	10	30	30	45	-
1600/5A	10	30	30	45	-